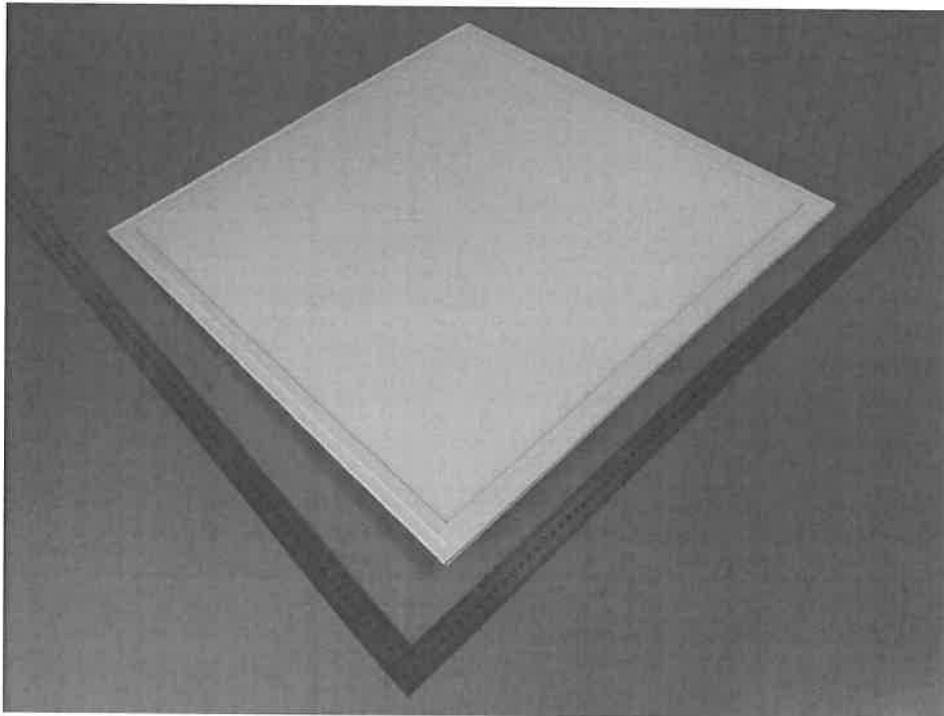


Prüfbericht-Nr.: <i>Test Report No.:</i>	17045222 001	Auftrags-Nr.: <i>Order No.:</i>	164027353	Seite 1 von 3 Page 1 of 3
Kunden-Referenz-Nr.: <i>Client Reference No.:</i>	N/A	Auftragsdatum: <i>Order date:</i>	2014-12-15	
Auftraggeber: <i>Client:</i>	SHENZHEN SGSLIGHT TECHNOLOGY CO., LTD. Jinmeiwei Technology Park, High-tech Industry Park, Guanlan, Bao'an, Shenzhen, 518100 Guangdong, China			
Prüfgegenstand: <i>Test item:</i>	LED Panel Light			
Bezeichnung / Typ-Nr.: <i>Identification / Type No.:</i>	TLP-6060			
Auftrags-Inhalt: <i>Order content:</i>	Type examination			
Prüfgrundlage: <i>Test specification:</i>	IK06 test according to IEC 62262:2002 and Clause 4.13.1 of EN 60598-1:2008+A11			
Wareneingangsdatum: <i>Date of receipt:</i>	2014-12-15			
Prüfmuster-Nr.: <i>Test sample No.:</i>	141918-141921			
Prüfzeitraum: <i>Testing period:</i>	2014-12-15 to 2014-12-29			
Ort der Prüfung: <i>Place of testing:</i>	See page 2			
Prüflaboratorium: <i>Testing laboratory:</i>	TÜV Rheinland (Shenzhen) Co., Ltd.			
Prüfergebnis*: <i>Test result*:</i>	Pass			
geprüft von / tested by:		kontrolliert von / reviewed by:		
2014-12-30 Arvin Wang / Project Engineer 		2014-12-30 Winston Chen / Reviewer 		
Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>	Unterschrift <i>Signature</i>	Datum <i>Date</i>	Name / Stellung <i>Name / Position</i>
				Unterschrift <i>Signature</i>
Sonstiges / Other:				
1. This report is issued according to client's requirement. 2. Attachment 1: 1 page of equipment list.				
Zustand des Prüfgegenstandes bei Anlieferung: <i>Condition of the test item at delivery:</i>		Prüfmuster vollständig und unbeschädigt <i>Test item complete and undamaged</i>		
<p>* Legende: 1 = sehr gut 2 = gut 3 = befriedigend 4 = ausreichend 5 = mangelhaft P(ass) = entspricht o.g. Prüfgrundlage(n) F(ail) = entspricht nicht o.g. Prüfgrundlage(n) N/A = nicht anwendbar N/T = nicht getestet</p> <p>Legend: 1 = very good 2 = good 3 = satisfactory 4 = sufficient 5 = poor P(ass) = passed a.m. test specification(s) F(ail) = failed a.m. test specification(s) N/A = not applicable N/T = not tested</p>				
<p>Dieser Prüfbericht bezieht sich nur auf das o.g. Prüfmuster und darf ohne Genehmigung der Prüfstelle nicht auszugsweise vervielfältigt werden. Dieser Bericht berechtigt nicht zur Verwendung eines Prüfzeichens. <i>This test report only relates to the a. m. test sample. Without permission of the test center this test report is not permitted to be duplicated in extracts. This test report does not entitle to carry any test mark.</i></p>				

Test item	
Description :	LED Panel Light
Trademark :	N/A
Model and/or type reference	TLP-6060
Manufacturer	Same as client
Factory	Same as client
Rating(s).....	See below table
Test case verdicts	
Test case does not apply to the test object	N /A
Test item does meet the requirement	P(ass)
Test item does not meet the requirement	F(ail)
.....	
Testing	
Date of receipt of test item	2014-12-15
Date(s) of performance of test	2014-12-15 to 2014-12-29
.....	
General remarks	
This test report shall not be reproduced except in full without the written approval of the testing laboratory.	
The test results presented in this report relate only to the item tested.	
"(see remark #)" refers to a remark appended to the report.	
"(see appended table)" refers to a table appended to the report.	
Throughout this report a comma is used as the decimal separator.	
Remark:	
Product : LED Panel Light	
Rating: AC 100-240V, 50/60Hz, 40W	
1. This report is only for IK06 test.	
2. Test was performed on model TLP-6060	
3. Test condition: ta=25°C, R.H.=70%.	
Test location:	
Alpha Product Testing Laboratory	
Building B, ast Area of Nanchang Second Industrial Zone, Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China	

Impact tests:		Result
Impact energy:	1J according to IEC 62262	P
1) live parts		P
2) linings		P
3) protection		P
4) covers		P

Remark: During the test the enclosure shall be mounted on a rigid support, according to the manufacturer's instructions for use. A support is considered to be sufficiently rigid if its displacement is less than or equal to 0,1 mm under the effect of an impact directly applied and whose energy corresponds to the degree of protection. Alternative mounting and support, suitable for the product, may be specified in the relevant product standard. The number of impacts shall be five on each exposed face. The impacts shall be evenly distributed on the faces of the enclosure under test.

Photo


=== End of report ===

17045222 001

Attachment 1



Produkte
Products

Page 1 of 1

Alpha Product Testing Laboratory

Building B, 1st Area of Nanchang Second Industrial Zone, Gushu 2nd Road, Bao'an District, Shenzhen 518126, P.R. China

Eq. No.	Name	Manufacture	Model No.	Serial No.	MU	Date of Calibration	Date of next Calibration
SE061	Hammer	Zhilitong	CJ-3	C031028	U=0.02J, k=2	2014.10.24	2015.10.23

TÜV Rheinland (Shenzhen) Co., Ltd.

3&4 F, Cybio Technology Building No. 1, Langshan, No. 2 Road South, 5th Industrial Area, High-Tech Industry Park North, Nanshan District, 518057, Shenzhen, P. R. China