


CEILING / WALL MOUNT

For TLP-X/F/M/A/E Series

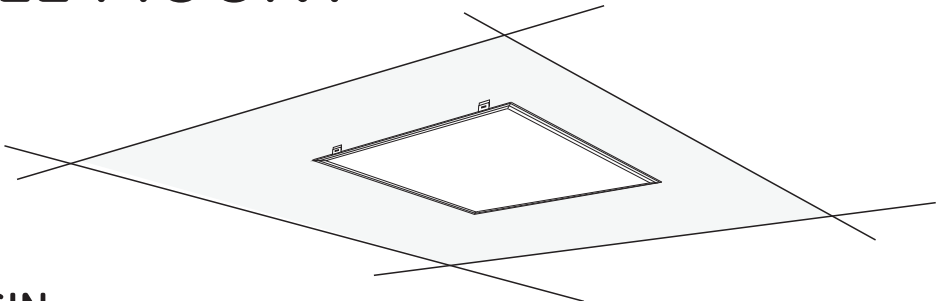

BEFORE YOU BEGIN

Read these instructions completely and carefully.

| ⚠ WARNING/AVERTISSEMENT | |
|--|---|
| RISK OF ELECTRIC SHOCK <ul style="list-style-type: none">• Turn power off before inspection, installation or removal.• Properly ground electrical enclosure. RISK OF FIRE <ul style="list-style-type: none">• Follow all NEC and local codes.• Use only UL or IEC approved wire for input/output connections. Minimum size 18 AWG (0.75mm²). | RISQUES DE DÉCHARGES ÉLECTRIQUES <ul style="list-style-type: none">• Coupez l'alimentation avant d'inspecter, installer ou déplacer le luminaire.• Assurez-vous de correctement mettre à la terre le boîtier d'alimentation électrique. RISQUES D'INCENDIE <ul style="list-style-type: none">• Respectez tous les codes NEC et codes locaux.• N'utilisez que des fils approuvés par UL ou IEC pour les entrées/sorties de connexion. Taille minimum 18 AWG (0.75mm²). |

Prepare Electrical Wiring

Refer to *TLP Series LED Panel Specification* for more lamp electronical data info.



Electrical Requirements

- The LED luminaire must be connected to the mains supply according to its ratings on the product label.



Grounding Instructions

- The grounding and bonding of the overall system shall be done in accordance to local electric code of the country where the luminaire is installed.

Save These Instructions








Use only in the manner intended by the manufacturer. If you have any questions, contact the manufacturer.

| ⚠ CAUTION |
|---|
| Do not perforate the integrity of the luminaire. Only screw into the threaded mounting bracket holes located at the four corners of the fixture. |
| ⚠ WARNING/AVERTISSEMENT |
| Risk of Fire. Do not install insulation within 3 inches (76 mm) of luminaire top. Risques d'incendie. Ne pas installer d'isolation à moins de 76 mm (3 pouces) au-dessus du luminaire. |


Storage Info

| | |
|---|--------------------|
| Environmental Operating Temperature Range | -10°C to +40°C |
| Environmental Rating | Dry location rated |
| Environmental Storage Temperature Range | -40°C to +60°C |


CEILING /WALL MOUNT KIT

| Items | TLP-WK4 | | | | TLP-WK6 | |
|---|---------|------|------|------|---------|------|
| | 3030 | 3060 | 6060 | 6262 | 3012 | 6012 |
|  bracket A | | X 4 | | | X 6 | |
|  bracket B | | X 4 | | | X 6 | |
|  | | X 4 | | | X 6 | |
|  | | X 4 | | | X 6 | |
|  | | X 4 | | | X 6 | |
|  | | X 4 | | | X 6 | |
|  | | X 4 | | | X 6 | |


INSTALLATION STEPS

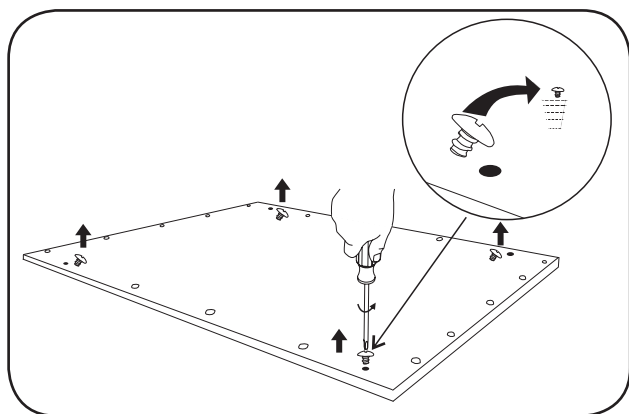


- ① Unscrew the highlighted screws from the four corners of the LED Panel.

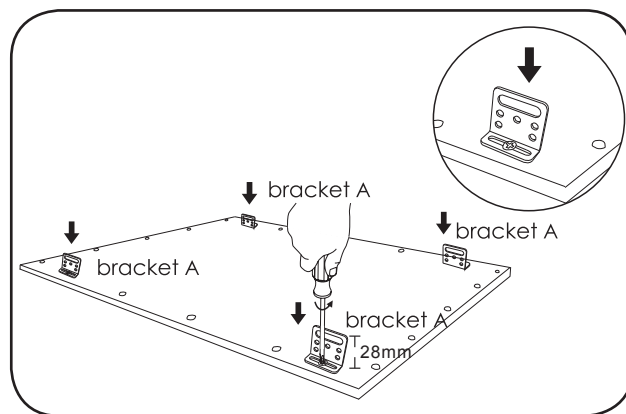


- ② Fix the four brackets 'A' to the back of the LED Panel.

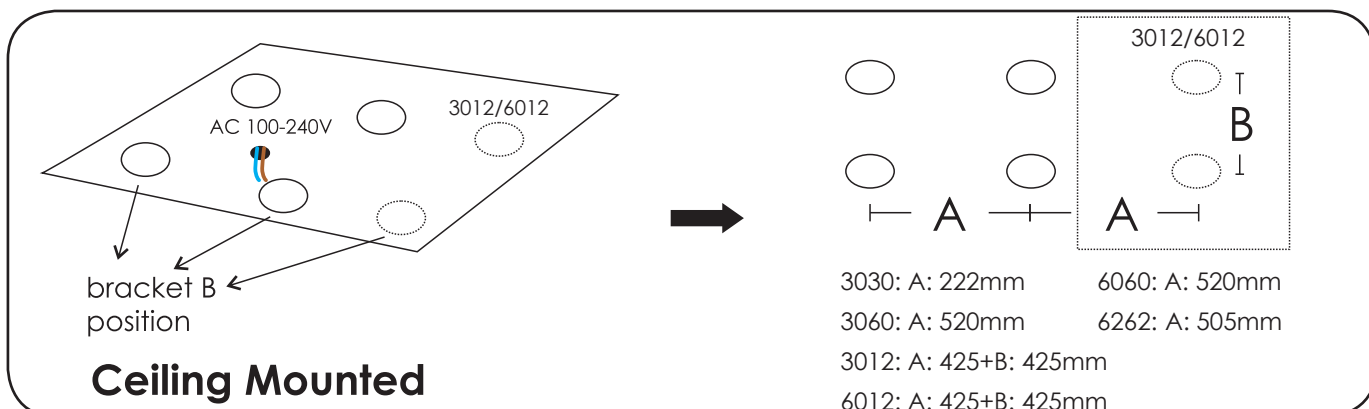


- ③ Please note instructions above for the mounting location of the four brackets 'B'.

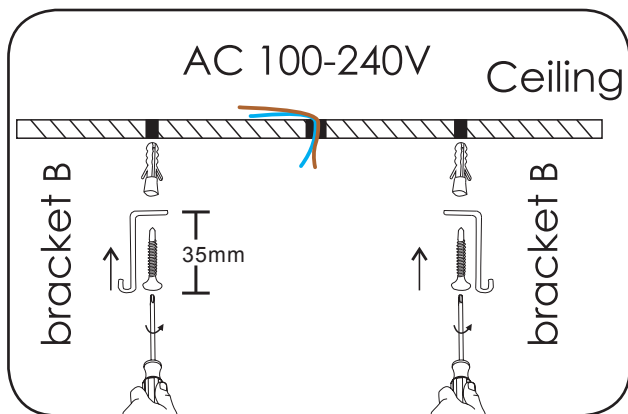


4 Screw the four brackets 'B' to the ceiling.

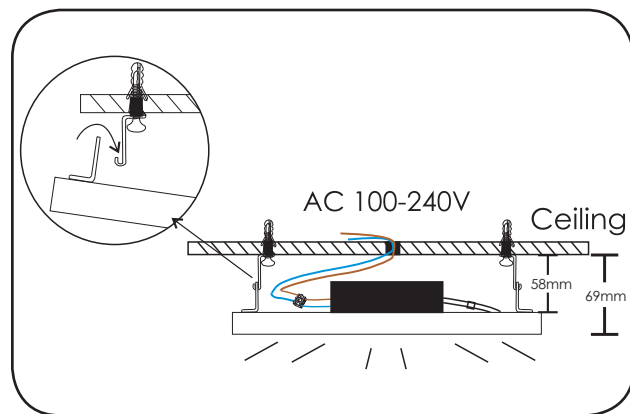

5 Mount the LED Panel to the ceiling, ensure the brackets align.

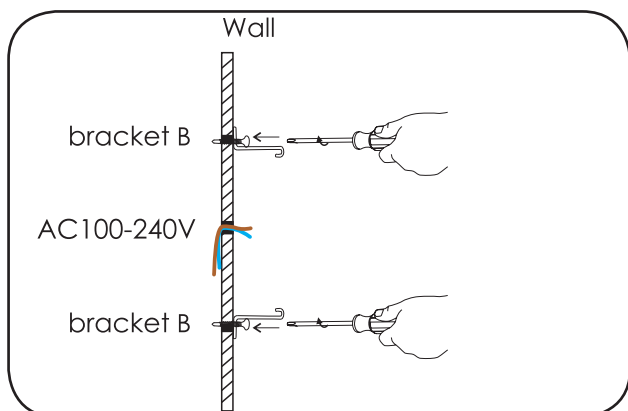

6 In case of wall installation, mount the brackets 'B' to the wall.

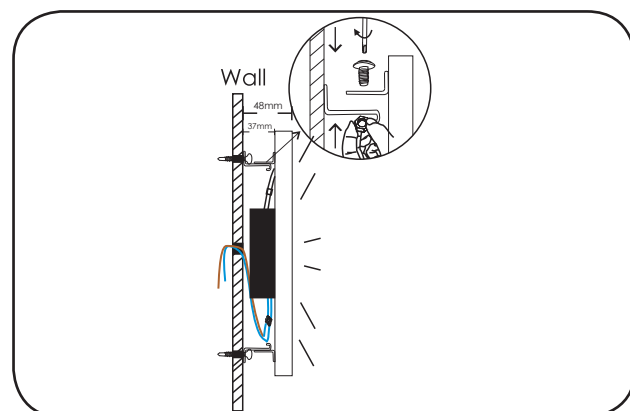

7 Mount the Panel to the wall, ensure the brackets align and fix the safety screws through the brackets.