

Features & Benefits


- IP65 special size LED panel: 150x1196 mm
- 90+ CRI LED panel with up to 80 lm/W efficacy
- TUV CB, GS, EMC and RoHS certified
- Philips Xitanium LED Driver, flicker free
- LM80 18x35mil 2835 SMD, 97.1% lumen maintenance @ 6,000 hours
- 3T PS LGP; 1.2T CHIMEI PS diffuser and TORAY frosted enhanced light reflector
- ElecCoat™ technology provides white appearance, with superb heat dissipation performance
- NanoGap™ technology ensures the high lumen efficacy and protection of the LEDs
- Dimmable: DALI / 0-10V / TRIAC optional
- 3 years warranty

* TLP-V-1512N/C-40




Specifications

	TLP-V-1512-40-IP65			TLP-V-1512-54-IP65		
Rated Power (W) ±5%	40			54		
Input Voltage / Frequency	220-240VAC 50/60Hz					
Driver Output	32-42VDC / 1050mA			33-40VDC / 1400mA		
PF	>0.9					
THD	<15%					
Efficiency	85%					
CCT (K)	6000	4000	3000	6000	4000	3000
LM Output (lm) ±5%	3200	3200	2880	4050	4050	3670
Lumen Efficacy (lm/W) ±5%	80	80	72	75	75	68
LED Type / Quantity	18x35mil Chip / 216pcs					
LM80	>97.1% lumen maintenance @ 6,000hrs					
CRI / SDCM	>90 / <3					
Warranty	5 years					
Life	50,000hrs					
Dimmable Control	DALI / 0~10V / Traic Optional					
Frame Color / RAL	Pure white / RAL9016					
Dimensions	150x1196x11mm					
Weight	3.2 Kg					
IP / IK / Glow-wire	IP65 / IK06 / 650 ℃					
Temperature / Humidity	Working: -20 ℃ ~40 ℃ Storage: <60 ℃ / <75%					
UGR	< 22					

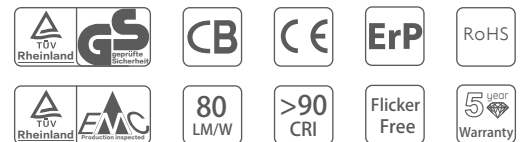

Product Dimension



Type	Dimension		
	A	B	C
TLP-V-1512	1196	150	11



Ordering Information

Example : TLP-V-6060N-40



Model	Size	Color Temp	Wattage
TLP-V	1512 150*1196	W 3000K	40 40W
		N 4000K	54 54W
		C 6000K	

Photometric Data


TLP-V-1512N-40-IP65 40W 4000k

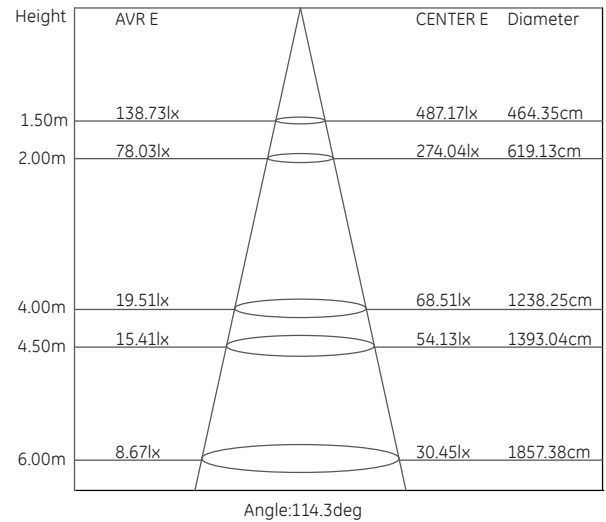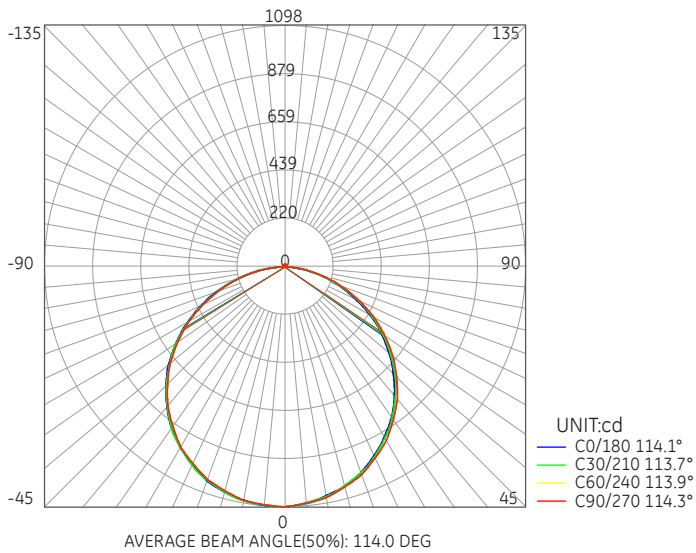

TLP-V-1512N-54-IP65 54W 4000k

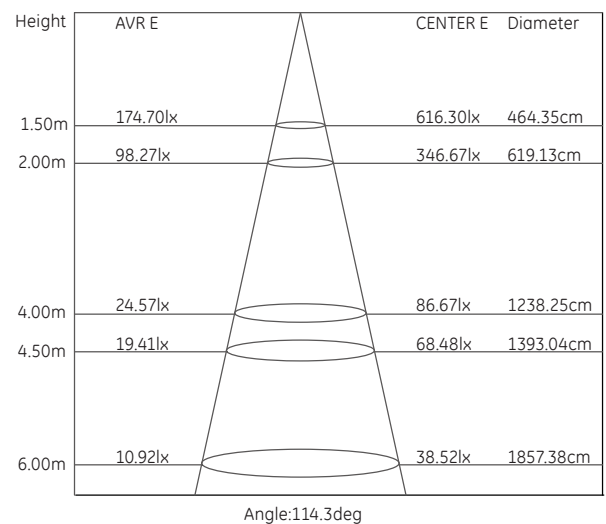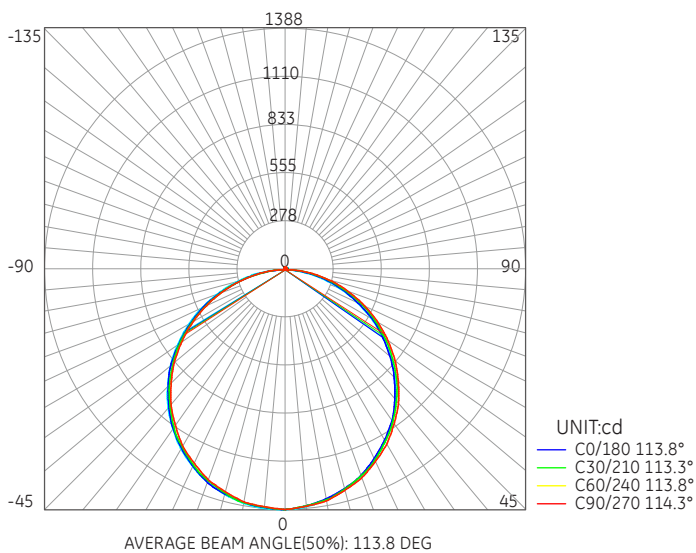

Packing Information

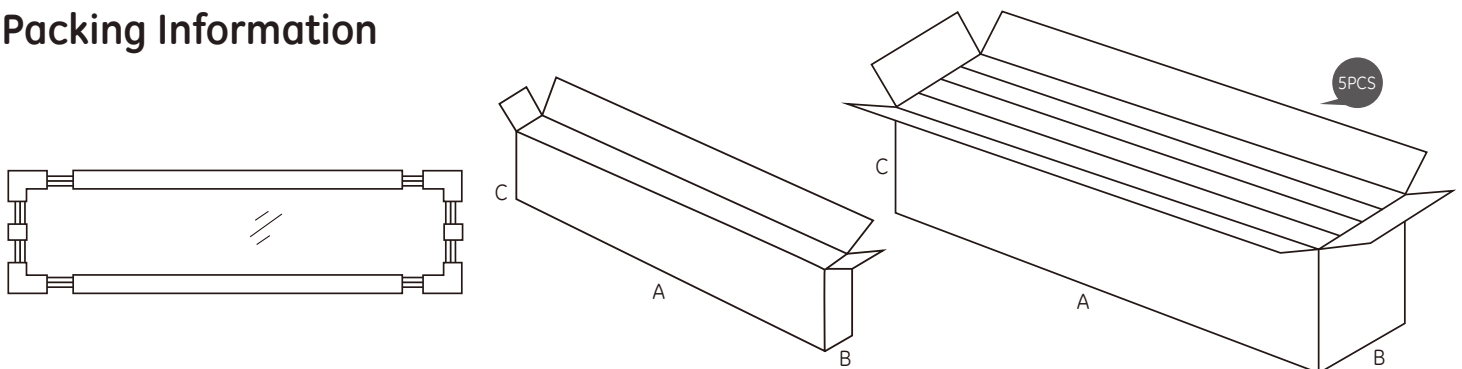

Panel	Box		Carton	
Model No.	ABC MAX (mm)	GW (kg)	ABC MAX (mm)	GW (kg)
TLP-V-1512	1290*35*200	3.45	1320*200*210	18.8