


Features & Benefits

- IP65 special size LED panel: 150x1496 mm
- 90+ CRI LED panel with up to 80 lm/W efficacy
- TUV CB, GS, EMC and RoHS certified
- Philips Xitanium LED Driver, flicker free
- LM80 18x35mil 2835 SMD, 97.1% lumen maintenance @ 6,000 hours
- 3T PS LGP; 1.2T CHIMEI PS diffuser and TORAY frosted enhanced light reflector
- ElecCoat™ technology provides white appearance, with superb heat dissipation performance
- NanoGap™ technology ensures the high lumen efficacy and protection of the LEDs
- Dimmable: DALI / 0-10V / TRIAC optional
- 3 years warranty




Specifications

	TLP-V-1515-70-IP65		
Rated Power (W) ±5%	70		
Input Voltage / Frequency	220-240VAC 50/60Hz		
Driver Output	32-42VDC / 900mA x 2		
PF	>0.9		
THD	<15%		
Efficiency	85%		
CCT (K)	6000	4000	3000
LM Output (lm) ±5%	5600	5600	5040
Lumen Efficacy (lm/W) ±5%	80	80	72
LED Type / Quantity	26x46mil Chip / 264pcs		
LM80	>98.8% lumen maintenance @ 6,000hrs		
CRI / SDCM	>90 / <3		
Warranty	5 years		
Life	50,000hrs		
Dimmable Control	DALI / 0~10V / Traic Optional		
Frame Color / RAL	Pure white / RAL9016		
Dimensions	150x1496x11mm		
Weight	4.3 Kg		
IP / IK / Glow-wire	IP65 / IK06 / 650 °C		
Temperature / Humidity	Working: -20 °C ~40 °C Storage: <60 °C / <75%		
UGR	< 22		

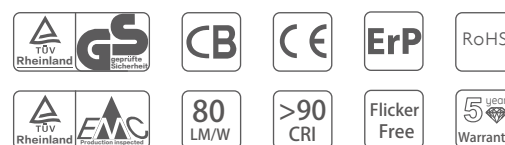

Product Dimension



Type	Dimension		
	A	B	C
TLP-V-1515	1496	150	11



Ordering Information

Example : TLP-V-1515N-70


Model	Size	Color Temp	Wattage
TLP-V	1515 150*1496	W 3000K	66 66W
		N 4000K	
		C 6000K	

Photometric Data

TLP-V-1515N-70-IP65 70W 4000k

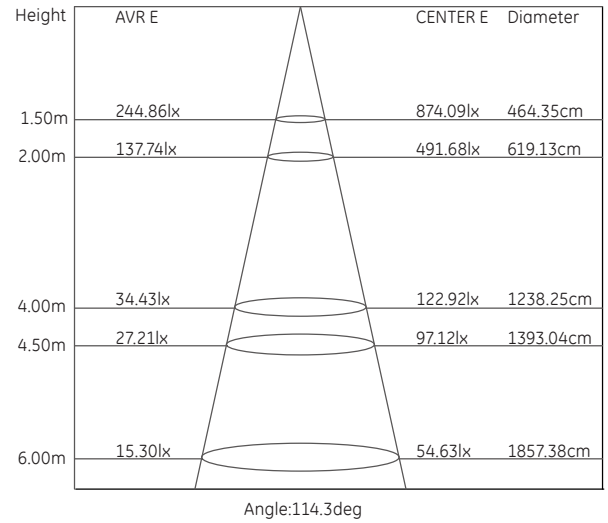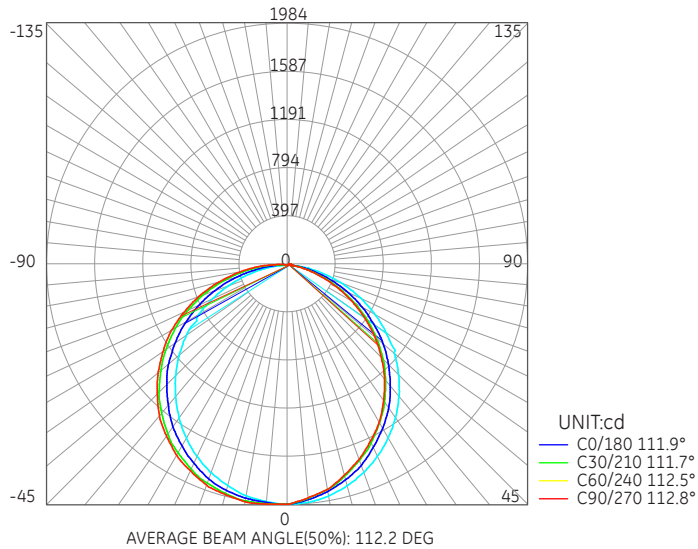

Packing Information

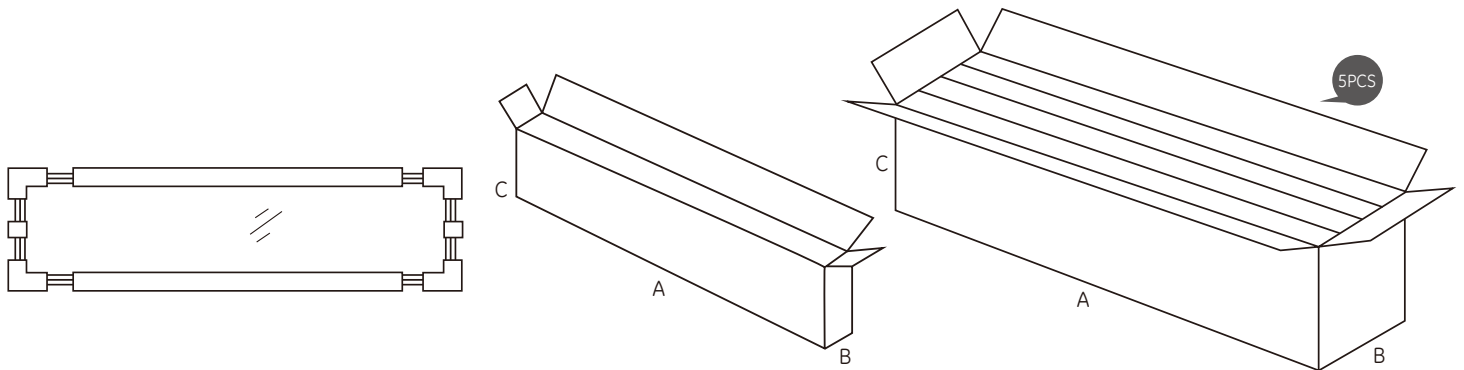

Panel		Box		Carton	
Model No.	ABC MAX (mm)	GW (kg)	ABC MAX (mm)	GW (kg)	
TLP-V-1515	1590*35*200	4.5	1620*200*210	24.5	