


## Features & Benefits

- IP65 special size LED panel: 296x1496 mm
- 90+ CRI LED panel with up to 85 lm/W efficacy
- TUV CB, GS, EMC and RoHS certified
- Philips Xitanium LED Driver, flicker free
- LM80 18x35mil 2835 SMD, 97.1% lumen maintenance @ 6,000 hours
- 3T PS LGP; 1.2T CHIMEI PS diffuser and TORAY frosted enhanced light reflector
- ElecCoat™ technology provides white appearance, with superb heat dissipation performance
- NanoGap™ technology ensures the high lumen efficacy and protection of the LEDs
- Dimmable: DALI / 0-10V / TRIAC optional
- 3 years warranty




## Specifications

|                           | TLP-V-3015-70-IP65                            |      |      |
|---------------------------|-----------------------------------------------|------|------|
| Rated Power (W) ±5%       | 70                                            |      |      |
| Input Voltage / Frequency | 220-240VAC 50/60Hz                            |      |      |
| Driver Output             | 32-42VDC / 900mA x 2                          |      |      |
| PF                        | >0.9                                          |      |      |
| THD                       | <15%                                          |      |      |
| Efficiency                | 85%                                           |      |      |
| CCT (K)                   | 6000                                          | 4000 | 3000 |
| LM Output (lm) ±5%        | 5950                                          | 5950 | 5390 |
| Lumen Efficacy (lm/W) ±5% | 85                                            | 85   | 77   |
| LED Type / Quantity       | 18x35mil Chip / 264pcs                        |      |      |
| LM80                      | >97.1% lumen maintenance @ 6,000hrs           |      |      |
| CRI / SDCM                | >90 / <3                                      |      |      |
| Warranty                  | 5 years                                       |      |      |
| Life                      | 50,000hrs                                     |      |      |
| Dimmable Control          | DALI / 0~10V / Traic Optional                 |      |      |
| Frame Color / RAL         | Pure white / RAL9016                          |      |      |
| Dimensions                | 296x1496x11mm                                 |      |      |
| Weight                    | 7.6 Kg                                        |      |      |
| IP / IK / Glow-wire       | IP65 / IK06 / 650 °C                          |      |      |
| Temperature / Humidity    | Working: -20 °C ~40 °C Storage: <60 °C / <75% |      |      |
| UGR                       | < 22                                          |      |      |



## Product Dimension

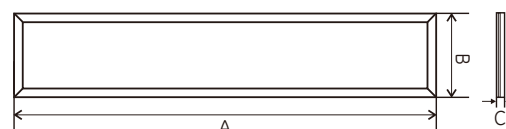

| Type       | Dimension |     |    |
|------------|-----------|-----|----|
|            | A         | B   | C  |
| TLP-V-3015 | 1496      | 296 | 11 |



## Ordering Information

Example : TLP-V-3015N-70


| Model               | Size | Color Temp | Wattage |
|---------------------|------|------------|---------|
| TLP-V 3015 296*1496 |      | W 3000K    | 70 70W  |
|                     |      | N 4000K    |         |
|                     |      | C 6000K    |         |

## Photometric Data

TLP-V-3015N-70-IP65 70W 4000k

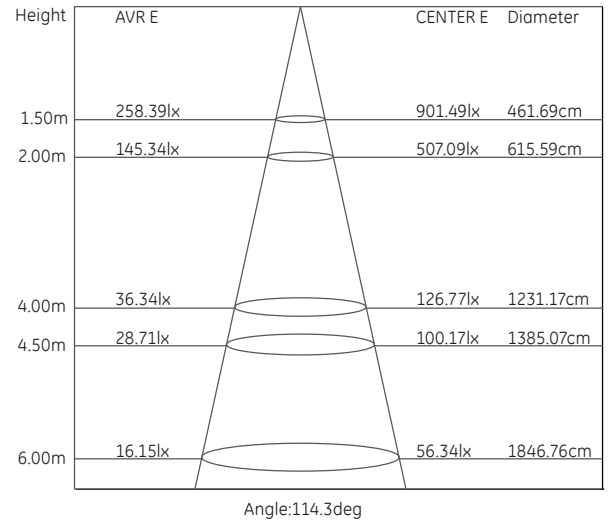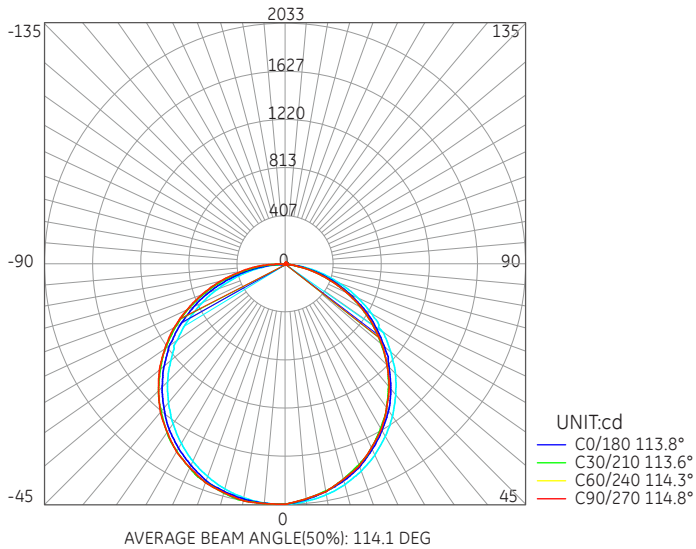

## Packing Information

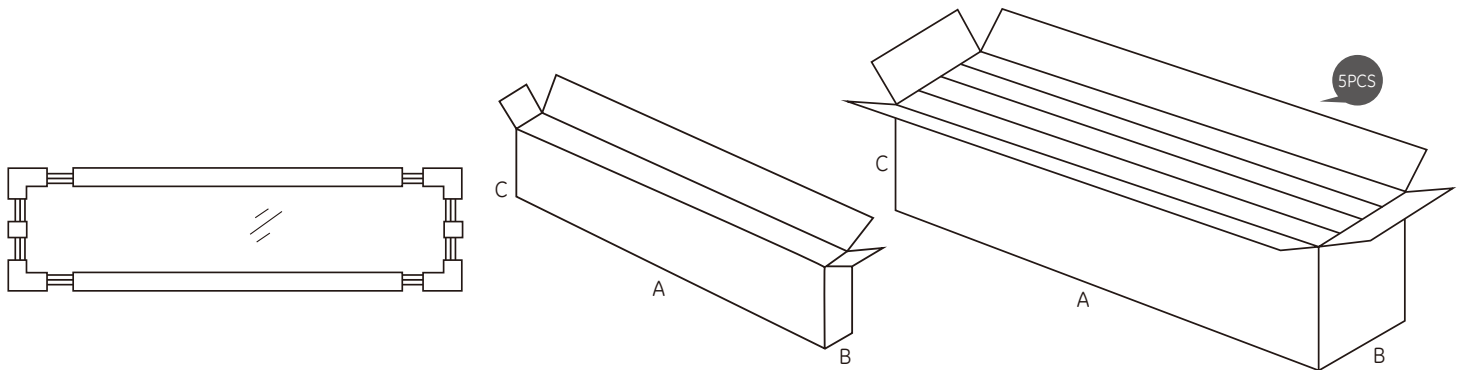

| Panel      |              | Box     |              | Carton  |  |
|------------|--------------|---------|--------------|---------|--|
| Model No.  | ABC MAX (mm) | GW (kg) | ABC MAX (mm) | GW (kg) |  |
| TLP-V-3015 | 1590*35*340  | 7.9     | 1620*200*360 | 41.5    |  |