

Features & Benefits


- IP65 special size LED panel: 150x1496 mm
- *80 lm/W high lumen efficacy, with high 80+ CRI
- TUV CB, GS, EMC and RoHS certified
- Philips Xitanium LED Driver, flicker free
- LM80 26x46mil 2835 SMD, 98.8% lumen maintenance @ 6,000 hours
- 3T PS LGP; 1.2T CHIMEI PS diffuser and TORAY frosted enhanced light reflector
- ElecCoat™ technology provides white appearance, with superb heat dissipation performance
- NanoGap™ technology ensures the high lumen efficacy and protection of the LEDs
- Dimmable: DALI / 0-10V / TRIAC optional
- 3 years warranty

*TLP-X-1515N/C-70




Specifications

	TLP-X-1515-70-IP65			TLP-X-1515-80-IP65		
Rated Power (W) ±5%	70			80		
Input Voltage / Frequency	220-240VAC 50/60H					
Driver Output	32-42VDC / 900mA x 2			32-42VDC / 1050mA x 2		
PF	>0.9					
THD	<15%					
Efficiency	85%					
CCT (K)	6000	4000	3000	6000	4000	3000
LM Output (lm) ±5%	5600	5600	5040	6000	6000	5600
Lumen Efficacy (lm/W) ±5%	80	80	72	75	75	70
LED Type / Quantity	26x46mil Chip / 264pcs					
LM80	>98.8% lumen maintenance @ 6,000hrs					
CRI / SDCM	>80 / <3					
Warranty	5 years					
Life	50,000hrs					
Dimmable Control	DALI / 0~10V / Traic Optional					
Frame Color / RAL	Pure white / RAL9016					
Dimensions	150x1496x11mm					
Weight	4.3 Kg					
IP / IK / Glow-wire	IP65 / IK06 / 650 C					
Temperature / Humidity	Working: -20℃ ~40℃ Storage: <60℃ / <75%					
UGR	< 22					



Product Dimension



Type	Dimension		
	A	B	C
TLP-X-1515	1496	150	11


Ordering Information

Example : TLP-X-1515N-70

Model	Size	Color Temp	Wattage
TLP-X 1515 150*1496		W 3000K	70 70W
		N 4000K	
		C 6000K	

Photometric Data


TLP-X-1515N-70 70W 4000k

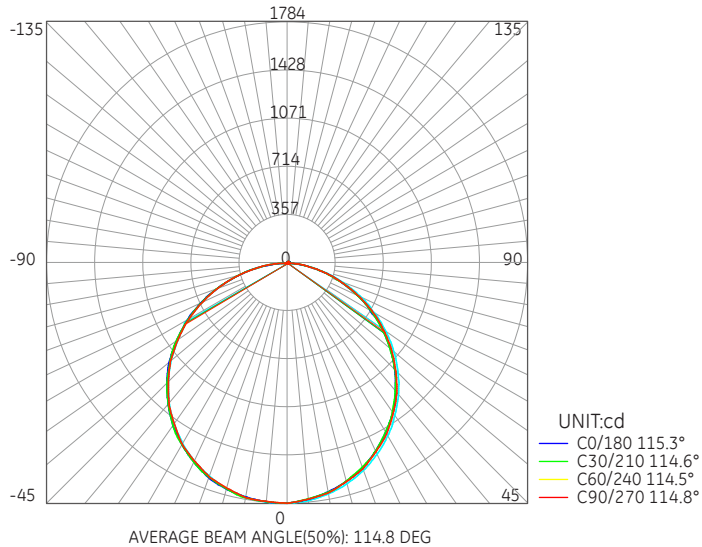

Height	AVR E	CENTER E	Diameter
1.50m	222.26lx	792.76lx	470.47cm
2.00m	125.02lx	445.93lx	627.30cm
4.00m	31.25lx	111.48lx	1254.59cm
4.50m	24.70lx	88.08lx	1411.42cm
6.00m	13.89lx	49.55lx	1881.89cm

Angle:115.0deg


TLP-X-1515N-80 80W 4000k

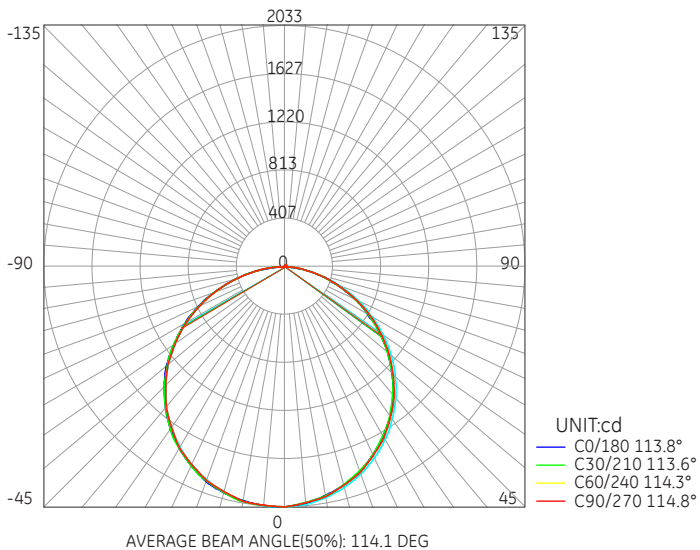

Height	AVR E	CENTER E	Diameter
1.50m	258.39lx	901.49lx	461.69cm
2.00m	145.34lx	507.09lx	615.59cm
4.00m	36.34lx	126.77lx	1231.17cm
4.50m	28.71lx	100.17lx	1385.07cm
6.00m	16.15lx	56.34lx	1846.76cm

Angle:114.0deg

Packing Information

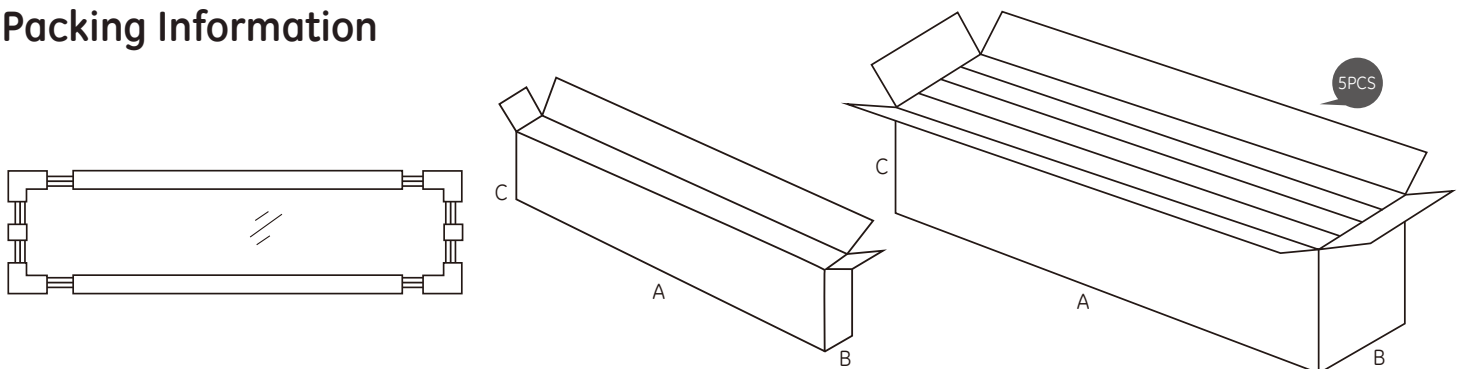

Panel	Box		Carton	
Model No.	ABC MAX (mm)	GW (kg)	ABC MAX (mm)	GW (kg)
TLP-X-1515	1590*35*200	4.5	1620*200*210	24.5