


Features & Benefits

- IP65 special size LED panel: 296x1496 mm
- *100 lm/W high lumen efficacy, with high 80+ CRI
- TUV CB, GS, EMC and RoHS certified
- Philips Xitanium LED Driver, flicker free
- LM80 26x46mil 2835 SMD, 98.8% lumen maintenance @ 6,000 hours
- 3T PS LGP; 1.2T CHIMEI PS diffuser and TORAY frosted enhanced light reflector
- ElecCoat™ technology provides white appearance, with superb heat dissipation performance
- NanoGap™ technology ensures the high lumen efficacy and protection of the LEDs
- Dimmable: DALI / 0-10V / TRIAC optional
- 3 years warranty

* TLP-X-3015N/C-70




Specifications

	TLP-X-3015-70-IP65			TLP-X-3015-80-IP65		
Rated Power (W) ±5%	70			80		
Input Voltage / Frequency	220-240VAC 50/60H					
Driver Output	32-42VDC / 900mA x 2			32-42VDC / 1050mA x 2		
PF	>0.9					
THD	<15%					
Efficiency	85%					
CCT (K)	6000	4000	3000	6000	4000	3000
LM Output (lm) ±5%	7000	7000	6300	8000	8000	7200
Lumen Efficacy (lm/W) ±5%	100	100	90	100	100	90
LED Type / Quantity	26x46mil Chip / 264pcs					
LM80	>98.8% lumen maintenance @ 6,000hrs					
CRI / SDCM	>80 / <3					
Warranty	5 years					
Life	50,000hrs					
Dimmable Control	DALI / 0~10V / Traic Optional					
Frame Color / RAL	Pure white / RAL9016					
Dimensions	296x1496x11mm					
Weight	7.6 Kg					
IP / IK / Glow-wire	IP65 / IK06 / 650 C					
Temperature / Humidity	Working: -20℃ ~40℃ Storage: <60℃ / <75%					
UGR	< 22					



Product Dimension

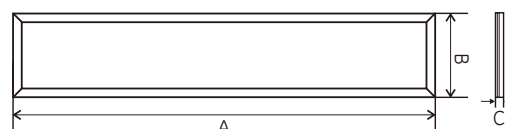

Type	Dimension		
	A	B	C
TLP-X-3015	1496	296	11



Ordering Information

Example : TLP-X-3015N-66



Model	Size	Color Temp	Wattage
TLP-X 3015 296*1496		W 3000K	
		N 4000K	66 66W
		C 6000K	

Photometric Data



TLP-X-3015N-70 70W 4000k

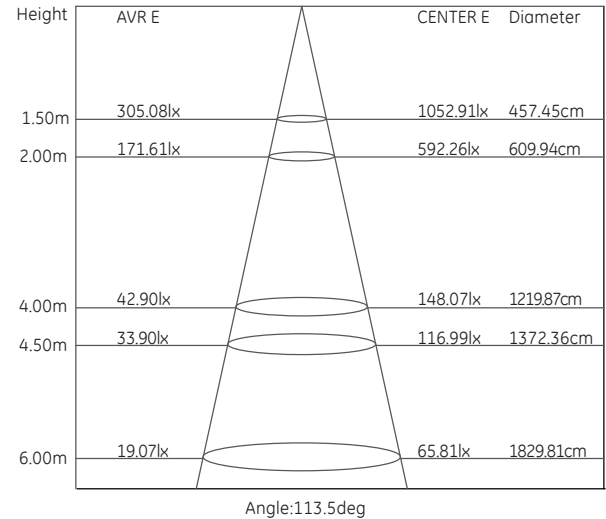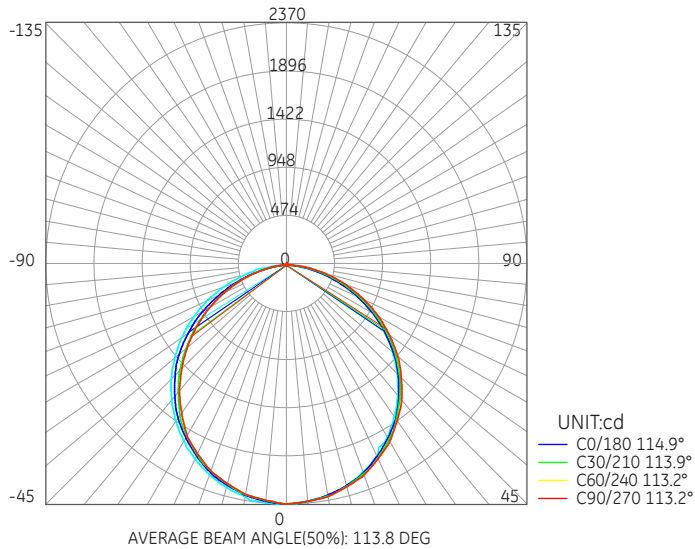

TLP-X-3015N-80 80W 4000k

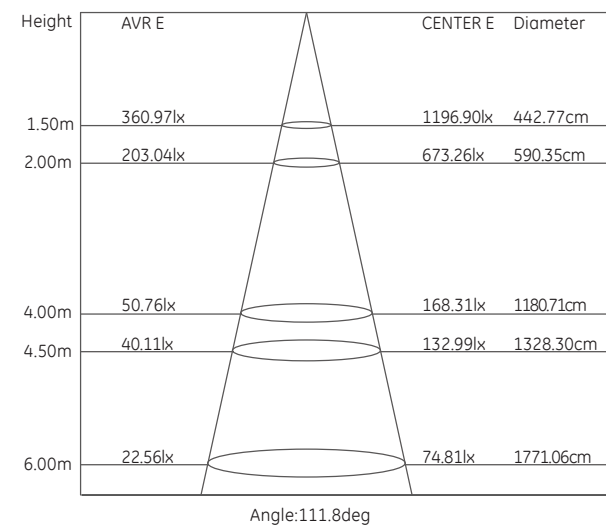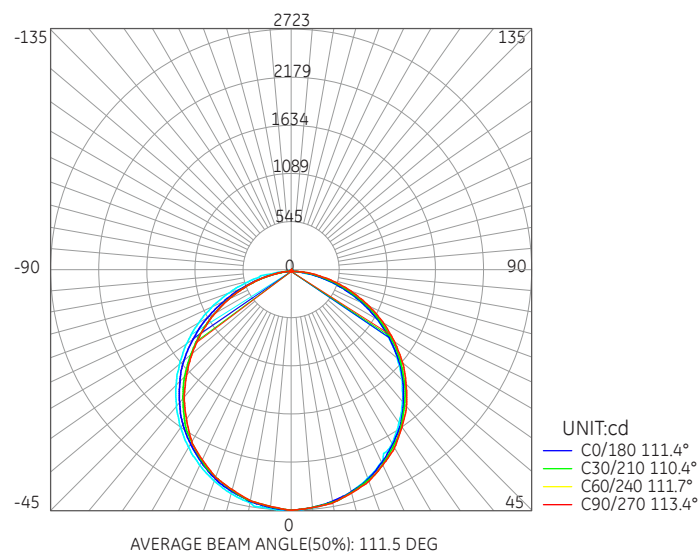

Packing Information

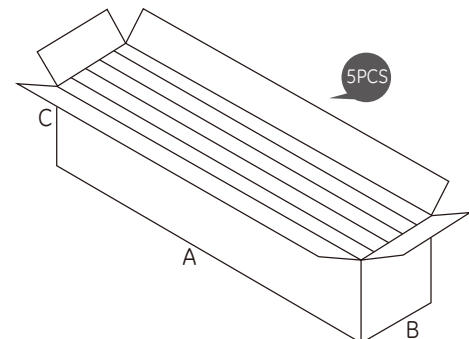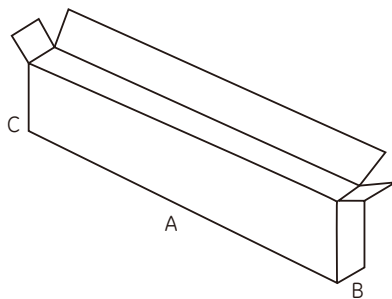

Panel	Box		Carton	
Model No.	ABC MAX (mm)	GW (kg)	ABC MAX (mm)	GW (kg)
TLP-X-3015	1590*35*340	7.9	1620*200*360	41.5