

Features & Benefits

- 100 lm/W high lumen efficacy, 80+ CRI
- TUV CB, CE and RoHS certified
- Lifud high efficiency LED driver, flicker free
- High efficiency LM80 SMD LEDs
- PS light guide panel
- ElecCoat™ technology provides white appearance, with superb heat dissipation performance
- NanoGap™ technology ensures the high lumen efficacy and protection of the LEDs
- Dimmable: DALI / 0-10V / TRIAC optional
- TpA fire-resistant PC diffuser optional
- 3 years warranty




Technical Data

Input Voltage	*220-240VAC / 50/60 Hz
PF	*≥0.95@230VAC
THD	*≤20%
Driver Efficiency	*≥90%@230VAC
Life	50,000 hrs
Dimmable Control	DALI / 0-10V / Triac Optional
Frame Color	White
IP / IK / Glow-wire	IP40 / IK06 / 650 °C
Temperature / Humidity	Working: -20-40 °C Storage: <60 °C / <75%
UGR	<22

*LF-GIF040YA LED Driver

Product Dimension

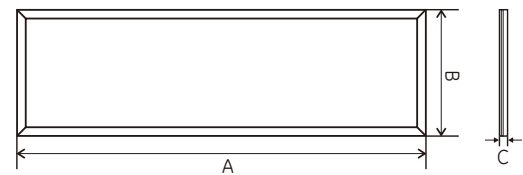

Type	Dimension		
	A	B	C
TLP-30120	1196	296	11

Specifications

	TLP-30120-36-100
Rated Power (W) ±5%	36
Driver Output	33-40VDC / 800mA
CCT (K)	6000 4000 3000
LM Output (lm) ±5%	3600 3600 3240
Lm/W ±5%	100 100 90
LED Type / Quantity	J170/14C16B 224pcs
LM80 lumen maintenance	>94.7% @ 6,000hrs
CRI / SDCM	>80 / <6
Warranty	3 years

Ordering Information

Example : TLP-30120-36-NW-100

Model	Size	Wattage	Color Temp	Lm/W
TLP	30120 296*1196	36 36W	WW 3000K NW 4000K CW 6000K	100

