

Features & Benefits

- 120 lm/W high lumen efficacy, 80+ CRI
- TUV CB, CE and RoHS certified
- Lifud high efficiency LED driver, flicker free
- High efficiency LM80 SMD LEDs
- PMMA light guide panel
- ElecCoat™ technology provides white appearance, with superb heat dissipation performance
- NanoGap™ technology ensures the high lumen efficacy and protection of the LEDs
- Dimmable: DALI / 0-10V / TRIAC optional
- TpA fire-resistant PC diffuser optional
- 5 years warranty



Technical Data


Input Voltage	*220-240VAC / 50/60 Hz
PF	*≥0.95@230VAC
THD	*≤20%
Driver Efficiency	*≥90%@230VAC
Life	50,000 hrs
Dimmable Control	DALI / 0-10V / Triac Optional
Frame Color	White
IP / IK / Glow-wire	IP40 / IK06 / 650 °C
Temperature / Humidity	Working: -20-40 °C Storage: <60 °C / <75%
UGR	<22

*LF-GIF040YA LED Driver

Specifications

	TLP-30120-36-120	TLP-30120-48-115	
Rated Power (W) ±5%	36	48	
Driver Output	33-40VDC / 850mA	33-40VDC / 1100mA	
CCT (K)	6000 4000 3000	6000 4000 3000	
LM Output (lm) ±5%	4320 4320 3960	5520 5520 4800	
Lm/W ±5%	120 120 110	115 115 100	
LED Type / Quantity	J200/14C16B 224pcs		
LM80 lumen maintenance	>98.8% @ 6,000hrs		
CRI / SDCM	>80 / <6		
Warranty	5 years		

Product Dimension

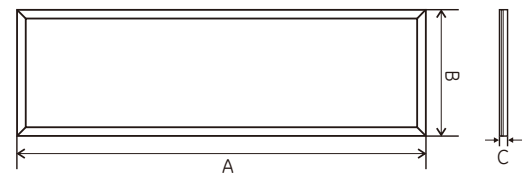

Type	Dimension		
	A	B	C
TLP-30120	1196	296	11

Ordering Information

Example : TLP-30120-36-NW-120

Model	Size	Wattage	Color Temp	Lm/W
TLP	30120 296*1196	36 36W	WW 3000K	115 120
		48 48W	NW 4000K	
			CW 6000K	

