



Features & Benefits

- New generation IP65 LED panel, no glue, clean surface
- UGR < 16 with up-to-date glare control diffuser
- 130 lm/W high lumen efficacy, 80+ CRI
- TUV CB, CE and RoHS certified
- Lifud high efficiency LED driver, flicker free
- High efficiency LM80 SMD LEDs
- PMMA light guide panel
- ElecCoat™ technology provides white appearance, with superb heat dissipation performance
- NanoGap™ technology ensures the high lumen efficacy and protection of the LEDs
- Dimmable: DALI / 0-10V / TRIAC optional
- 5 years warranty

IP65

UGR<16

Fire-resistant

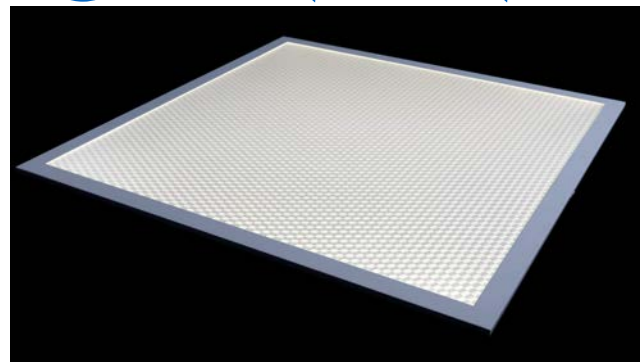

Technical Data


Input Voltage	*220-240VAC / 50/60 Hz
PF	*≥0.95@230VAC
THD	*≤20%
Driver Efficiency	*≥90%@230VAC
Life	50,000 hrs
Dimmable Control	DALI / 0-10V / Triac Optional
Frame Color	White
IP / IK / Glow-wire	IP65 / IK06 / 650 °C
Temperature / Humidity	Working: -20-40 °C Storage: <60 °C / <75%
UGR	<16

*LF-GIF040YA LED Driver

Specifications

	TLP-6060-26-130-NU-IP65	TLP-6060-36-125-NU-IP65
Rated Power (W) ±5%	26	36
Driver Output	33-40VDC / 600mA	33-40VDC / 850mA
CCT (K)	6000 4000 3000	6000 4000 3000
LM Output (lm) ±5%	3380 3380 3120	4500 4500 3960
Lm/W ±5%	130 130 120	125 125 110
LED Type / Quantity	J200/14C16B 224pcs	
LM80 lumen maintenance	>98.8% @ 6,000hrs	
CRI / SDCM	>80 / <6	
Warranty	5 years	

Product Dimension

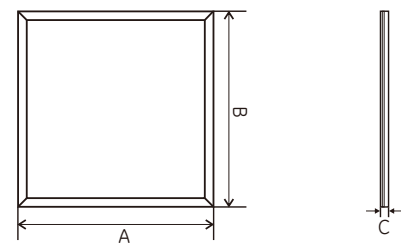

Type	Dimension		
	A	B	C
TLP-6060	596	596	11



Ordering Information

Example : TLP-6060-26-NW-130-NU-IP65




Model	Size	Wattage	Color Temp	Lm/W
TLP 6060 596*596		26 26W	WW 3000K	130
		36 36W	NW 4000K	
			CW 6000K	

Photometric Data

TLP-6060-36-NW-130-NU-IP65

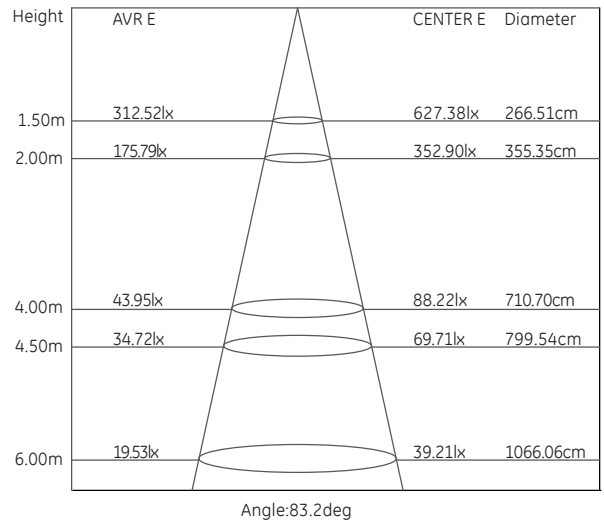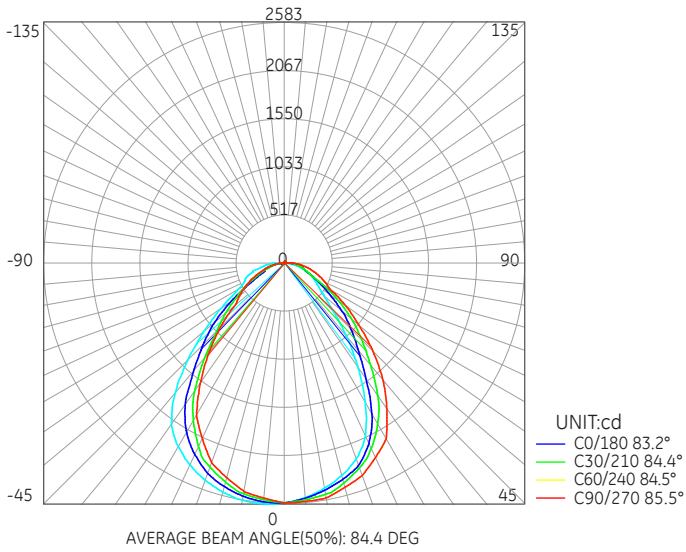

Packing Information



Panel	Box		Carton	
Model No.	ABC MAX (mm)	GW (kg)	ABC MAX (mm)	GW (kg)
TLP-6060-IP65	620*35*660	4.7	630*160*680	21.2