


Features & Benefits

- Economical version UGR < 19 with micro prismatic diffuser
- 100 lm/W high lumen efficacy, 80+ CRI
- TUV CB, CE and RoHS certified
- AGT high efficiency LED driver
- High efficiency LM80 SMD LEDs
- PS light guide panel
- ElecCoat™ technology provides white appearance, with superb heat dissipation performance
- NanoGap™ technology ensures the high lumen efficacy and protection of the LEDs
- Dimmable: DALI / 0-10V / TRIAC optional
- 2 years warranty

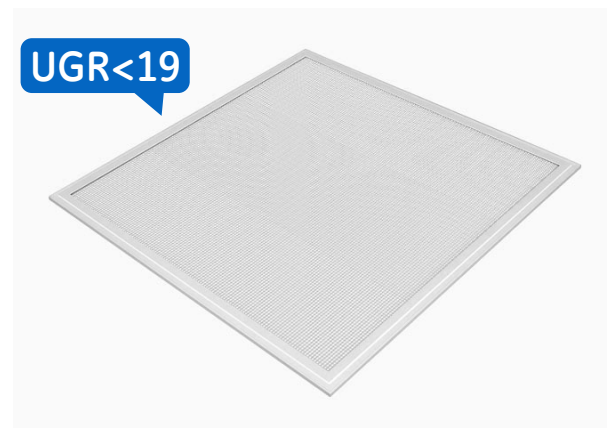

Technical Data


Input Voltage	*220-240VAC / 50/60 Hz
PF	*≥0.9@230VAC
THD	*≤15%
Driver Efficiency	*≥88%@230VAC
Life	30,000 hrs
Dimmable Control	DALI / 0-10V / Triac
Frame Color	Optional White
IP / IK / Glow-wire	IP40 / IK06 / 650 °C
Temperature / Humidity	Working: -20-40 °C Storage: <60 °C / <75%
UGR	<19

*AGT-I789JN LED Driver

Specifications

	TLP-6060-36-100E-UGR
Rated Power (W) ±5%	36
Driver Output	33-40VDC / 900mA
CCT (K)	6000 4000 3000
LM Output (lm) ±5%	3600 3600 3240
Lm/W ±5%	100 100 90
LED Type / Quantity	J190/12C16B 192pcs
LM80 lumen maintenance	>97.4% @ 6,000hrs
CRI / SDCM	>80 / <6
Warranty	2 years

Product Dimension

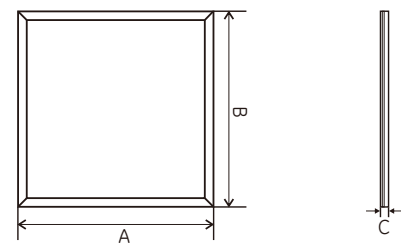

Type	Dimension		
	A	B	C
TLP-6060	596	596	11



Ordering Information

Example : TLP-6060-36-NW-100E-UGR




Model	Size	Wattage	Color Temp	Lm/W
TLP 6060 596*596	36 36W	NW 3000K	100	
		CW 6000K		

Photometric Data

TLP-6060-36-NW-100E-UGR

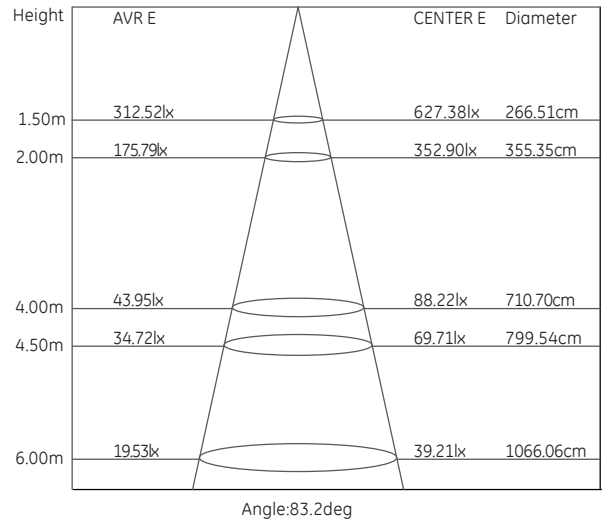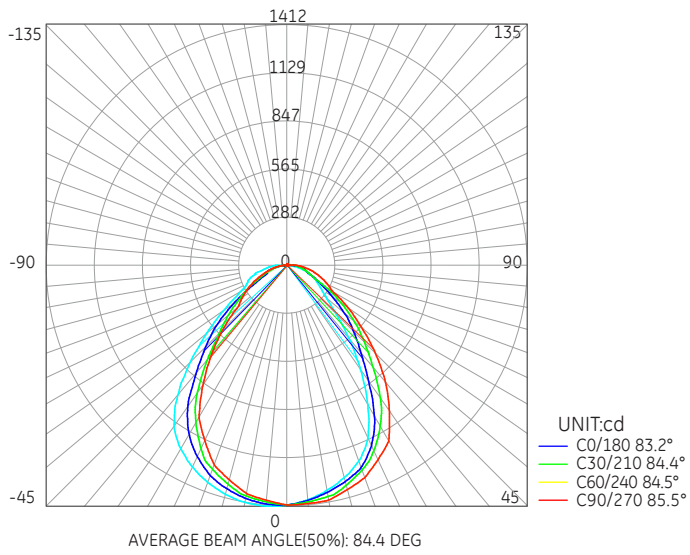

Packing Information



Panel	Box		Carton	
Model No.	ABC MAX (mm)	GW (kg)	ABC MAX (mm)	GW (kg)
TLP-6060	620*35*660	2.6	630*160*680	12